

LS-ALBS, BS-ALBS series

Welded steel heavy-duty castors, heavy-duty swivel head, wheel with Blickle Besthane® Soft polyurethane tread

450–1,150 kg

Bracket: LS/BS series

- particularly robust welded steel construction, zinc-plated, yellow-passivated, Cr6-free

Swivel bracket:

- axial grooved ball bearing ISO 104 and tapered roller bearing ISO 355 in the swivel head
- bolted and secured welded central kingpin, extremely strong
- dust and splash-proof
- grease nipple

Wheel: ALBS series

- tread: high-quality polyurethane elastomer Blickle Besthane® Soft, hardness 75 Shore A, colour blue, non-marking, non-staining
- wheel centre: die-cast aluminium, colour silver grey


Additional details:

- bracket series: page 94
- brakes: page 112–113
- wheel series: page 319
- bearing types: page 84–85



Blickle Besthane® Soft

5

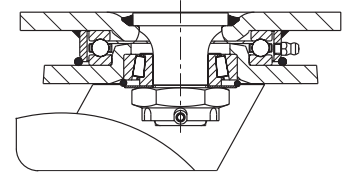

Swivel castors	Fixed castors	Swivel castor with "stop-top" brake	Wheel Ø [mm]	Wheel width [mm]	Load capacity [kg]	Bearing type	Total height [mm]	Plate size [mm]	Bolt hole spacing [mm]	Bolt hole Ø [mm]	Offset swivel castor [mm]
LS-ALBS 127K	BS-ALBS 127K	LS-ALBS 127K-ST	125	54	450	ball bearing	170	140 x 110	105 x 75–80	11	50
LS-ALBS 150K	BS-ALBS 150K	LS-ALBS 150K-ST	150	50	500	ball bearing	200	140 x 110	105 x 75–80	11	55
LS-ALBS 160K	BS-ALBS 160K	LS-ALBS 160K-ST	160	50	580	ball bearing	205	140 x 110	105 x 75–80	11	55
LS-ALBS 200K	BS-ALBS 200K	LS-ALBS 200K-ST	200	50	750	ball bearing	245	140 x 110	105 x 75–80	11	60
LS-ALBS 250K	BS-ALBS 250K	LS-ALBS 250K-ST	250	50	850	ball bearing	305	175 x 140	140 x 105	14	75
LS-ALBS 300K	BS-ALBS 300K	LS-ALBS 300K-ST	300	60	1,150	ball bearing	355	175 x 140	140 x 105	14	85

Versions / options



	with extremely crowned tread	with directional lock 4 x 90°	with steel foot guard	truck lock
Technical description page	55	115	116	114
Product code suffix	-CO	-RI4	-FS	FF 125 / 150 / 160 / 200
Available for	wheel Ø 160–200 mm	all	wheel Ø 125–250 mm	wheel Ø 125–200 mm