


## Versions / options for stainless steel, light-duty castors


### Corrosion-resistant synthetic expander fitting for round tubes

| Product code suffix for the LRXA series | Product code suffix for the LKRXA series | Internal tube dimension (P) [mm] | Available for all swivel castors in the LRXA/LKRXA series with bolt hole $\varnothing$ 11 mm. Swivel castor and expander secured to prevent loosening with positive locking. Maximum fitting length is 65 mm. <b>Increases total height of swivel castors by 3 mm.</b> |
|---|--|----------------------------------|--|
| -EXR02                                  | -EXR12                                   | $\varnothing$ 20–25              | Detailed description: page 105   |
| -EXR03                                  | -EXR13                                   | $\varnothing$ 25–30              |  |
| -EXR04                                  | -EXR14                                   | $\varnothing$ 30–35              |  |
| -EXR05                                  | -EXR15                                   | $\varnothing$ 35–40              |  |

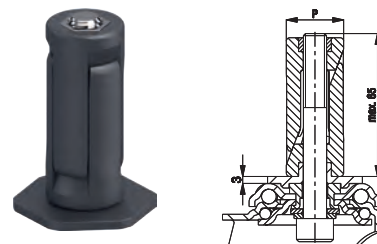


### Corrosion-resistant synthetic expander fitting for square tubes

| Product code suffix for the LRXA series | Product code suffix for the LKRXA series | Internal tube dimension (P) [mm] | Available for all swivel castors in the LRXA/LKRXA series with bolt hole $\varnothing$ 11 mm. Swivel castor and expander secured to prevent loosening with positive locking. Maximum fitting length is 65 mm. <b>Increases total height of swivel castors by 3 mm.</b> |
|---|--|----------------------------------|--|
| -EXV02                                  | -EXV12                                   | $\square$ 18–21                  | Detailed description: page 105   |
| -EXV03                                  | -EXV13                                   | $\square$ 21–25                  |  |
| -EXV04                                  | -EXV14                                   | $\square$ 25–29                  |  |
| -EXV05                                  | -EXV15                                   | $\square$ 29–32                  |  |
| -EXV07                                  | -EXV17                                   | $\square$ 32–38.5                |  |
|   | -EXV18                                   | $\square$ 35.5–41                |  |

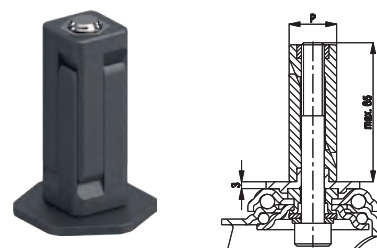

### Stainless steel plug-in stem in accordance with DIN 18867-8 (large-scale catering equipment)

| Product code suffix | Stem dimension ( $\varnothing$ x height) (P x Q) [mm] | $\varnothing$ Cross hole (d) [mm] | Position cross hole (H) [mm] | Available for all swivel castors in the LKRXA-TPA and LKRXA-PATH series with wheel $\varnothing$ 125 mm and bolt hole $\varnothing$ 13 mm. Detailed description: page 104 |
|---------------------|---|-----------------------------------|------------------------------|---|
| -ZAX51              | $\varnothing$ 18.0 x 62                               | M6                                | 30                           |   |



### Buffers for round and square tubes

| Product code                            | Wheel $\varnothing$ (D) [mm] | Wheel width (T1) [mm] | Hole (d) [mm]     | Buffers reduce the risk of damage to walls and vehicles in the event of a collision. Buffers for round and square tubes are fixed or connected to tubular frames in the external areas of vehicles. <b>AG series:</b> Made from soft synthetic polyethylene, hardness 48 Shore D, colour silver grey RAL 7001, non-marking. <b>ARG series:</b> Made from solid rubber, hardness 75 Shore A, colour grey, non-marking. |
|---|------------------------------|-----------------------|-------------------|---|
| <b>Synthetic buffers (polyethylene)</b> |                              |                       |                   |   |
| AG 100/R25                              | 100                          | 17.5                  | $\varnothing$ 25  | Detailed description: page 116  |
| AG 100/V25                              | 100                          | 17.5                  | $\square$ 25 x 25 |   |
| AG 125/R25                              | 125                          | 17.5                  | $\varnothing$ 25  |   |
| AG 125/V25                              | 125                          | 17.5                  | $\square$ 25 x 25 |   |
| <b>Solid rubber buffers</b>             |                              |                       |                   |   |
| ARG 75/R10                              | 75                           | 23                    | $\varnothing$ 10  |   |
| ARG 100/R26                             | 100                          | 23                    | $\varnothing$ 26  |   |
| ARG 100/R32                             | 100                          | 23                    | $\varnothing$ 32  |   |
| ARG 125/R26                             | 125                          | 23                    | $\varnothing$ 26  |   |
| ARG 125/R32                             | 125                          | 23                    | $\varnothing$ 32  |   |

Other dimensions and special colours are available upon request.

