

BH-DSPKGSP0 series

Pressed steel castors, heavy-duty brackets, with cast nylon double flanged wheel



75–700 kg

Bracket: BH series


- pressed steel, zinc-plated, blue-passivated, Cr6-free
- heavy fork and top plate

Wheel: DSPKGSP0 series

- high-quality cast nylon, impact resistant, hardness 80 Shore D, colour natural beige

Additional details:

- wheel series: page 532
- bearing types: page 84–85

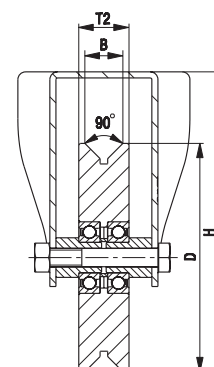

Fixed castors	Wheel Ø without flange (D) [mm]	Wheel width (T2) [mm]	Insertion width (B) [mm]	Load capacity [kg]	Bearing type	Total height (H) [mm]	Plate size [mm]	Bolt hole spacing [mm]	Bolt hole Ø [mm]
BH-DSPKGSP0 75K	75	22	16	75	ball bearing	118	100 x 85	80 x 60	9
BH-DSPKGSP0 100K-1	100	24	18	150	ball bearing	140	100 x 85	80 x 60	9
BH-DSPKGSP0 100K-3	100	24	18	150	ball bearing	140	140 x 110	105 x 75–80	11
BH-DSPKGSP0 101K-1 *	100	40	20	400	ball bearing	140	100 x 85	80 x 60	9
BH-DSPKGSP0 101K-3 *	100	40	20	400	ball bearing	140	140 x 110	105 x 75–80	11
BH-DSPKGSP0 120K-1	120	33	25	200	ball bearing	162	100 x 85	80 x 60	9
BH-DSPKGSP0 120K-3	120	33	25	200	ball bearing	162	140 x 110	105 x 75–80	11
BH-DSPKGSP0 125K *	125	50	25	700	ball bearing	170	140 x 110	105 x 75–80	11
BH-DSPKGSP0 150K	150	33	25	400	ball bearing	197	140 x 110	105 x 75–80	11
BH-DSPKGSP0 200K	200	33	25	500	ball bearing	245	140 x 110	105 x 75–80	11

* Wheels with wide tread that can also run outside of the rails.