

BH-DSPK series

Pressed steel castors, heavy-duty brackets, with solid steel double flanged wheel



250–900 kg

Bracket: BH series


- pressed steel, zinc-plated, blue-passivated, Cr6-free
- heavy fork and top plate

Wheel: DSPK series

- heat-treatable steel, hardness 190–230 HB

Additional details:

- wheel series: page 534
- bearing types: page 84–85

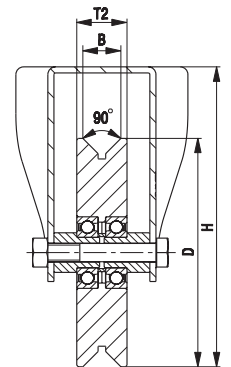

| Fixed castors | Wheel Ø (D) [mm] | Wheel width (T2) [mm] | Insertion width (B) [mm] | Load capacity [kg] | Bearing type | Total height (H) [mm] | Plate size [mm] | Bolt hole spacing [mm] | Bolt hole Ø [mm] |
|------------------|---------------------|--------------------------|-----------------------------|-----------------------|--------------|--------------------------|--------------------|---------------------------|---------------------|
| BH-DSPK 75K | 75 | 22 | 16 | 250 | ball bearing | 118 | 100 x 85 | 80 x 60 | 9 |
| BH-DSPK 100K-1 | 100 | 24 | 18 | 300 | ball bearing | 140 | 100 x 85 | 80 x 60 | 9 |
| BH-DSPK 100K-3 | 100 | 24 | 18 | 300 | ball bearing | 140 | 140 x 110 | 105 x 75–80 | 11 |
| BH-DSPK 101K-1 * | 100 | 40 | 20 | 600 | ball bearing | 140 | 100 x 85 | 80 x 60 | 9 |
| BH-DSPK 101K-3 * | 100 | 40 | 20 | 600 | ball bearing | 140 | 140 x 110 | 105 x 75–80 | 11 |
| BH-DSPK 120K-1 | 120 | 33 | 25 | 600 | ball bearing | 162 | 100 x 85 | 80 x 60 | 9 |
| BH-DSPK 120K-3 | 120 | 33 | 25 | 600 | ball bearing | 162 | 140 x 110 | 105 x 75–80 | 11 |
| BH-DSPK 125K * | 125 | 50 | 25 | 900 | ball bearing | 170 | 140 x 110 | 105 x 75–80 | 11 |
| BH-DSPK 150K | 150 | 33 | 25 | 800 | ball bearing | 197 | 140 x 110 | 105 x 75–80 | 11 |
| BH-DSPK 200K | 200 | 33 | 25 | 900 | ball bearing | 245 | 140 x 110 | 105 x 75–80 | 11 |

* Wheels with wide tread that can also run outside of the rails.